


**AERODROME CHART - ICAO**

AD 2 ESNX 2-1  
ARVIDSJAUR

ARP 653525N 0191655E  
AD ELEV 1245 FEET  
LEGEND See GEN 2.3  
Dimensions in m, ELEV in ft

TWY NR	WIDTH	Surface Bearing strength	Day marking			Taxiway lighting		
			Centerline Holding	CL	HLDG	Edge	Centerline	Stopbar
A	23 m	ASPH PCN 39 F/B/X/U	CL	HLDG	EDGE	EDGE	RGL	RGL
B	23 m	ASPH PCN 39 F/B/X/U	CL	HLDG	EDGE	EDGE	RGL	RGL


INS Coordinates for Aircraft Stands		
APRON Surface Bearing strength	NR	COORD
1		
ASPH PCN 39 F/B/X/U		

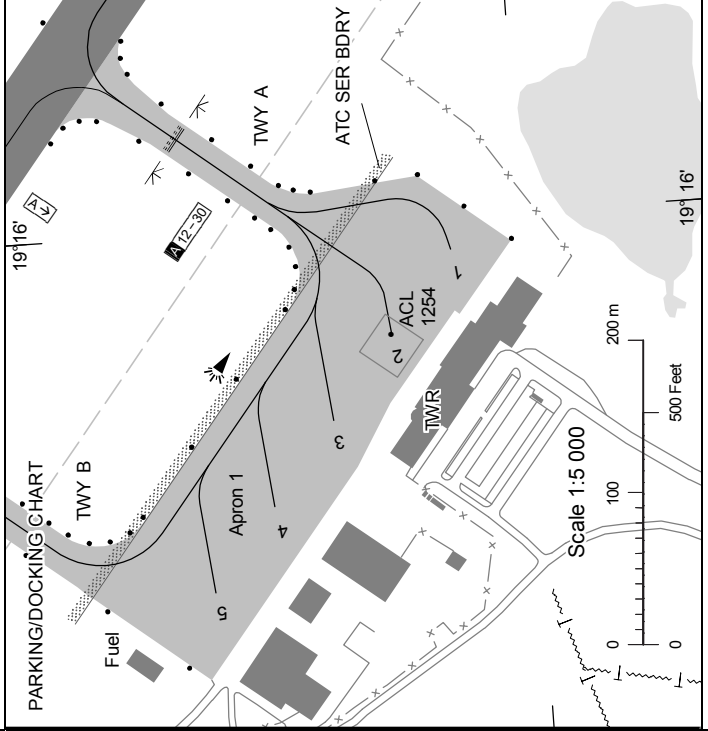

AIRAC AMDT 2/2018 29 MAR 2018

TWR 122.730 MHz

AIP SWEDEN

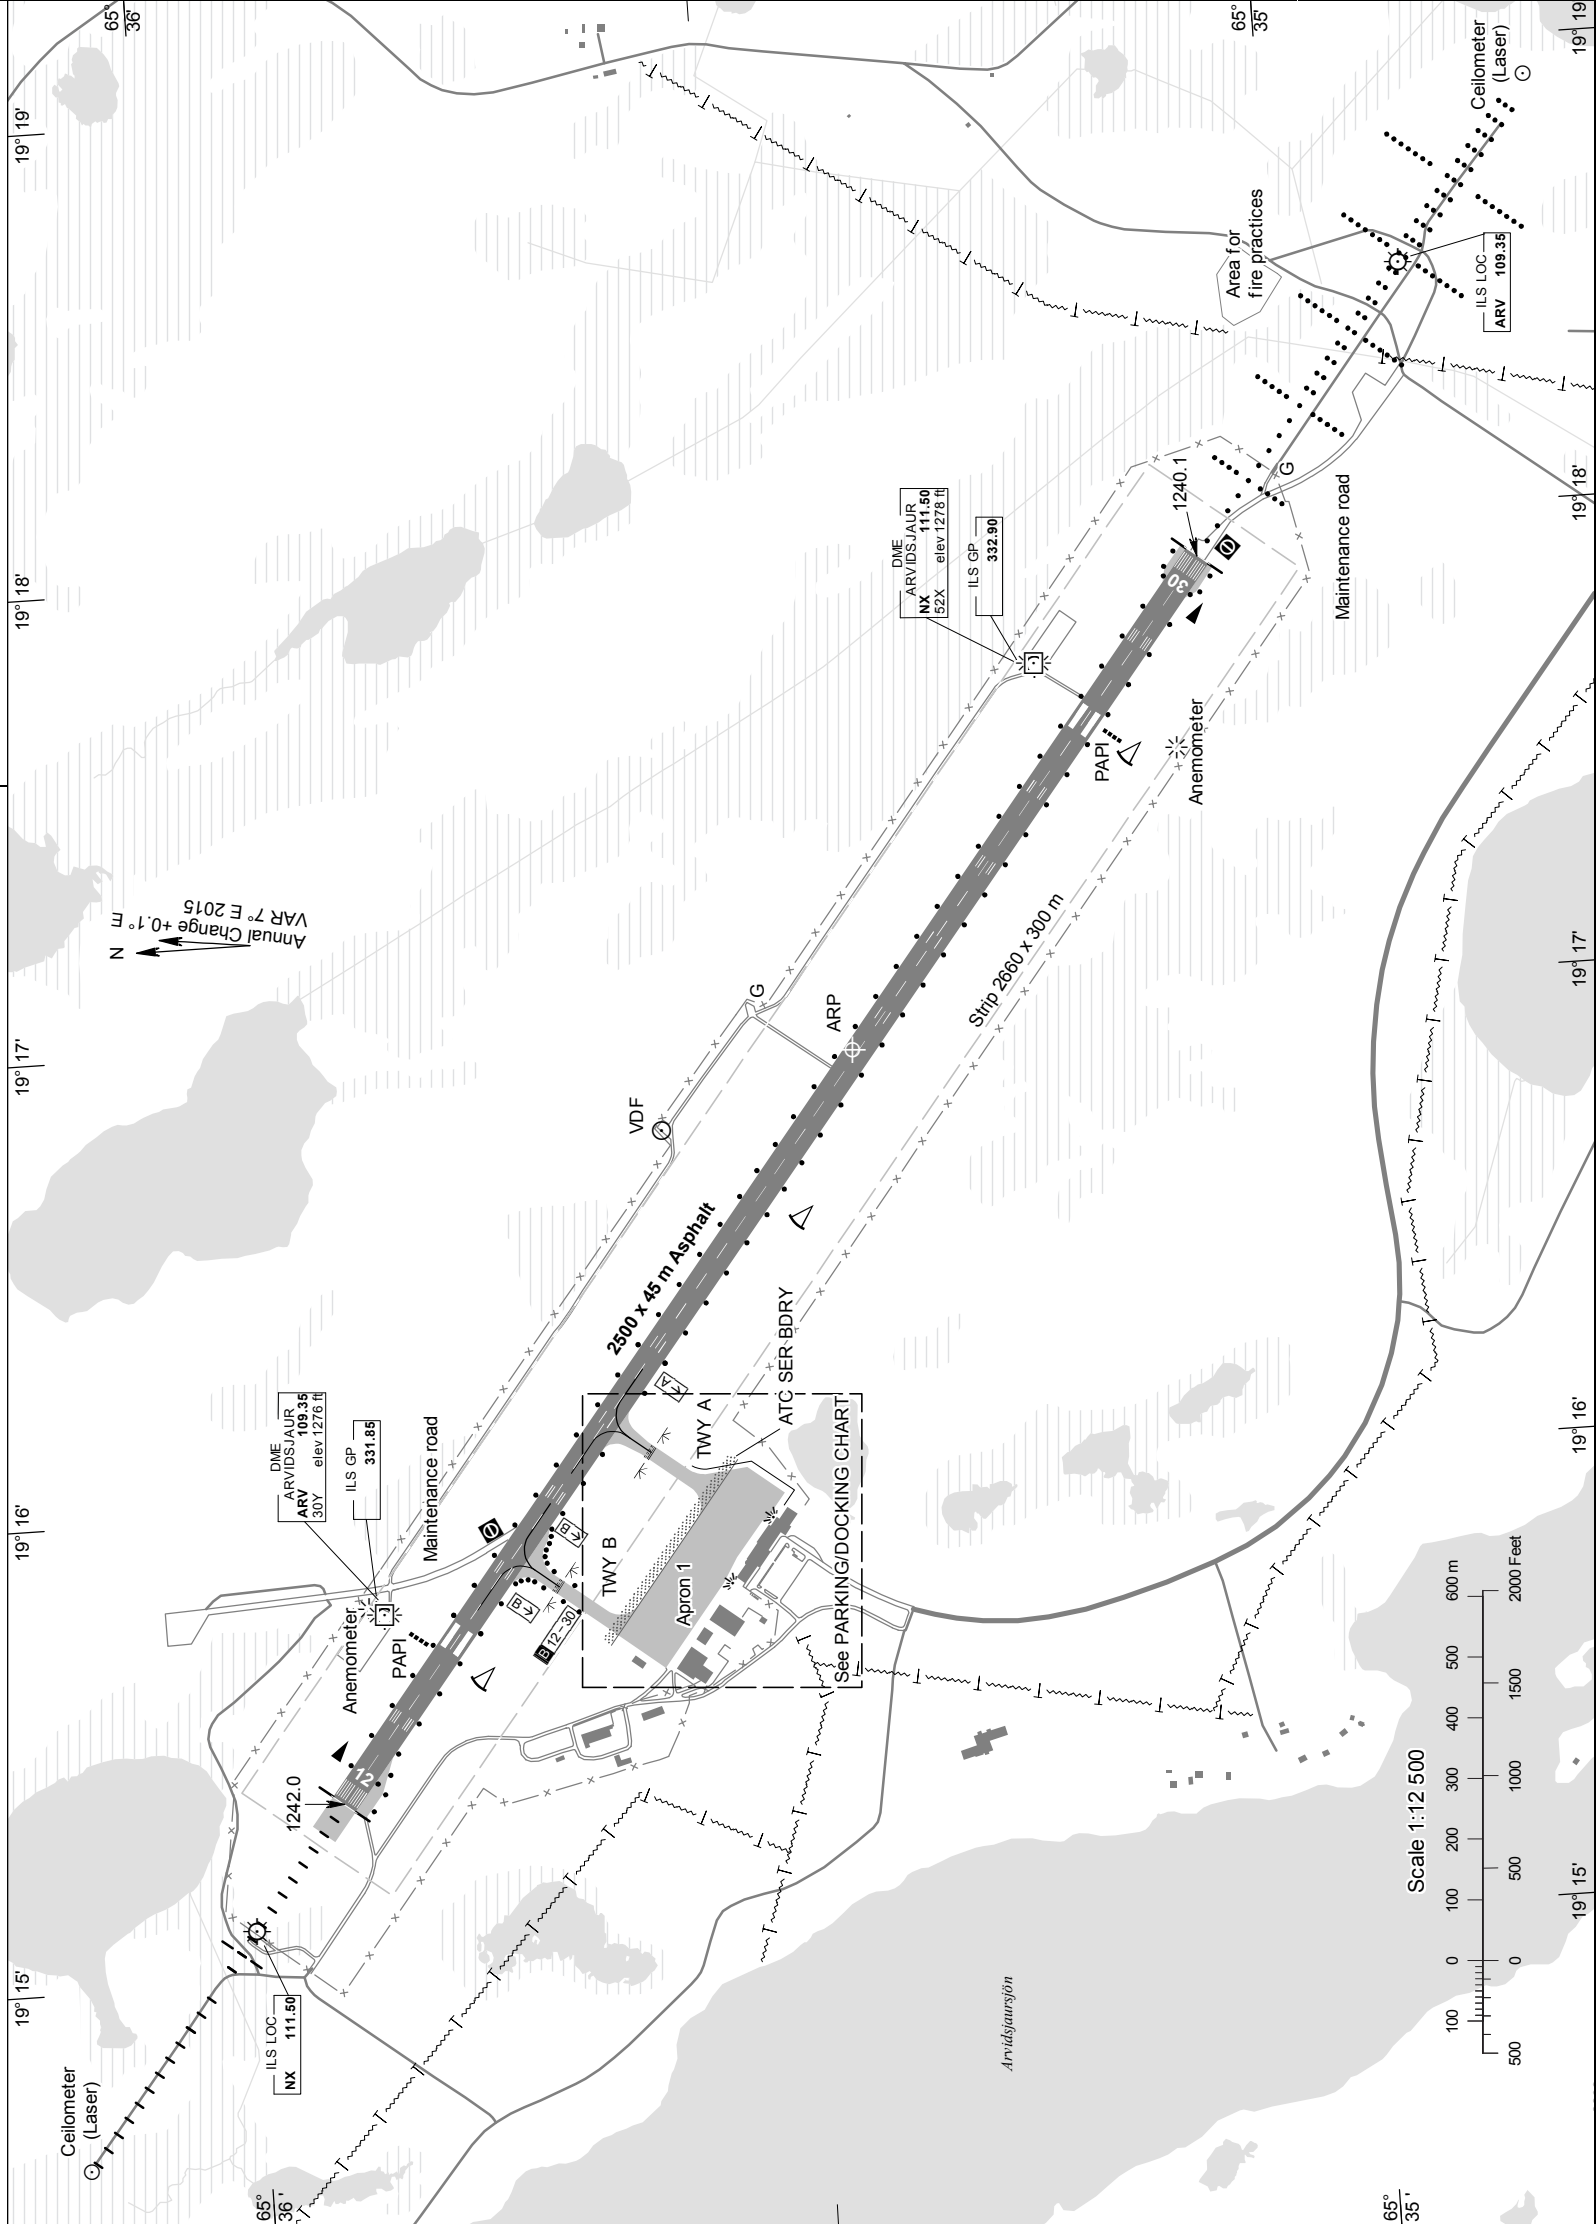

RWY NR	TRUE & MAG BRG	THR PSN Geoid undulation	Bearing strength	THR ELEV and highest ELEV of TDZ or precision APCH RWY	Declared distances			Approach and runway lighting					
12	128.19° GEO 121° MAG	653554.80N 0191522.22E GUND 92 ft	PCN 39 F/B/X/U	THR 1242.0 ft TDZ 1245 ft	TORA	TODA	ASDA	LDA	APCH	THR TRID TDZ	VASIS (MEHT)	Edge	End
30	308.23° GEO 301° MAG	653504.88N 0191756.52E GUND 92 ft	PCN 39 F/B/X/U	THR 1240.1 ft TDZ 1240 ft	2500	2500	2500	2500	Barrette CL Cat I 720 m LIL/LIH	THR Green	PAPI Left 3.00° (52.5 ft)	2500/60 m White Caution zone 600 m yellow LIL/LIH	Red
					2500	2500	2500	2500	Calvert Cat I 900 m LIL/LIH	THR Green	PAPI Left 3.00° (55.8 ft)	2500/60 m White Caution zone 600 m yellow LIL/LIH	Red

CHANGE: TWR FREQ.

LFV