


**INSTRUMENT
APPROACH
CHART – ICAO**

THR ELEV 1509 ft, AD ELEV 1509 ft


OCH are related to THR.
BRG are MAG (True).
ALT, HGT and ELEV in ft.

KIRUNA TOWER 130.155

RNP RWY 03

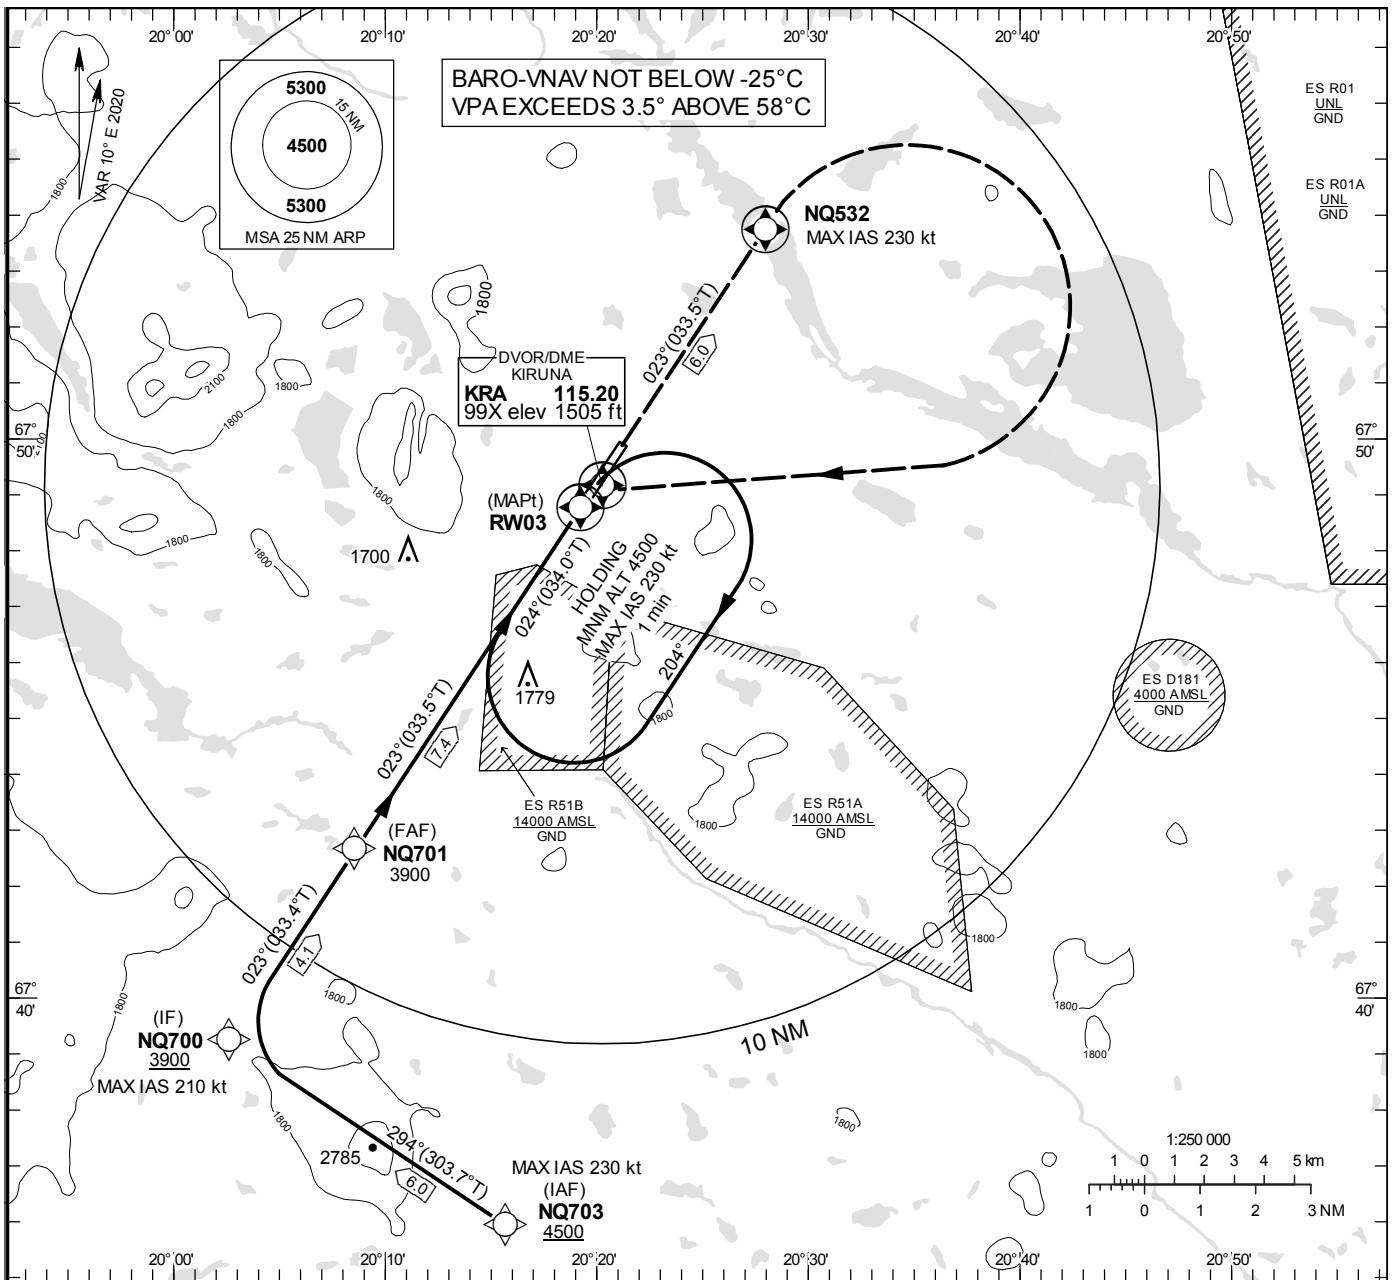

TA 6000 ft AMSL RDH 50 ft

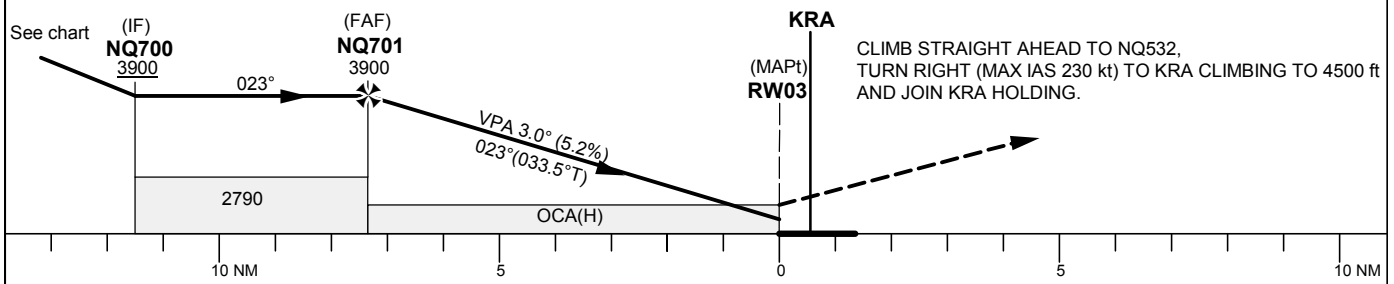

OCA (H)					Final approach	Distance FAF-MAPt 7.4 NM						
Cat of ACFT	A	B	C	D	Dist to RWY03 (NM)	7	6	5	4	3	2	
LNAV/VNAV	1840(331)	1850(341)	1860(351)	1870(361)	ALT (ft)	3788	3470	3151	2833	2514	2196	
LNAV	2030(520)	2030(520)	2030(520)	2030(520)	GS	kt	80	100	120	140	160	180
					Rate of descent	ft/min	425	530	635	745	850	955

RNP RWY 03 via NQ703

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
IF	NQ703	-	-	-	-	+4500	-230	-	-	RNP APCH
TF	NQ700	-	294°(303.7°)	6.0	-	-	-210	-	-	RNP APCH
TF	NQ701	-	023°(033.4°)	4.1	R	@3900	-	-	-	RNP APCH
TF	RW03	Y	023°(033.5°)	7.4	-	@1559	-	-3.0/50	-	RNP APCH
TF	NQ532	Y	023°(033.5°)	6.0	-	-	-230	-	-	RNP APCH
DF	KRA	Y	-	-	R	-	-	-	-	RNP APCH
HM	KRA	Y	024°(034.0°)	-	R	+4500	-230	-	-	RNP 1