


ARP 600116N 0133444E
AD ELEV 474 FEET
LEGEND See GEN 2.3
Dimensions in m, ELEV in ft

| TWY NR | WIDTH | Surface Bearing strength | Day marking | | Taxiway lighting | |
|--------|-------|-----------------------------|-----------------------|--------------------|------------------|----------------|
| | | | Centerline Holding | Edge Centerline | RGL Stopbar | RGL Stopbar |
| A | 15 m | ASPH PCN 26 F/B/X/T | CL HLDG | EDGE | RGL | RGL |

| INS Coordinates for Aircraft Stands | | | |
|--------------------------------------|----|-------|------|
| APRON Surface Bearing strength | NR | COORD | ELEV |
| ASPH PCN 22 F/B/X/T | | | |

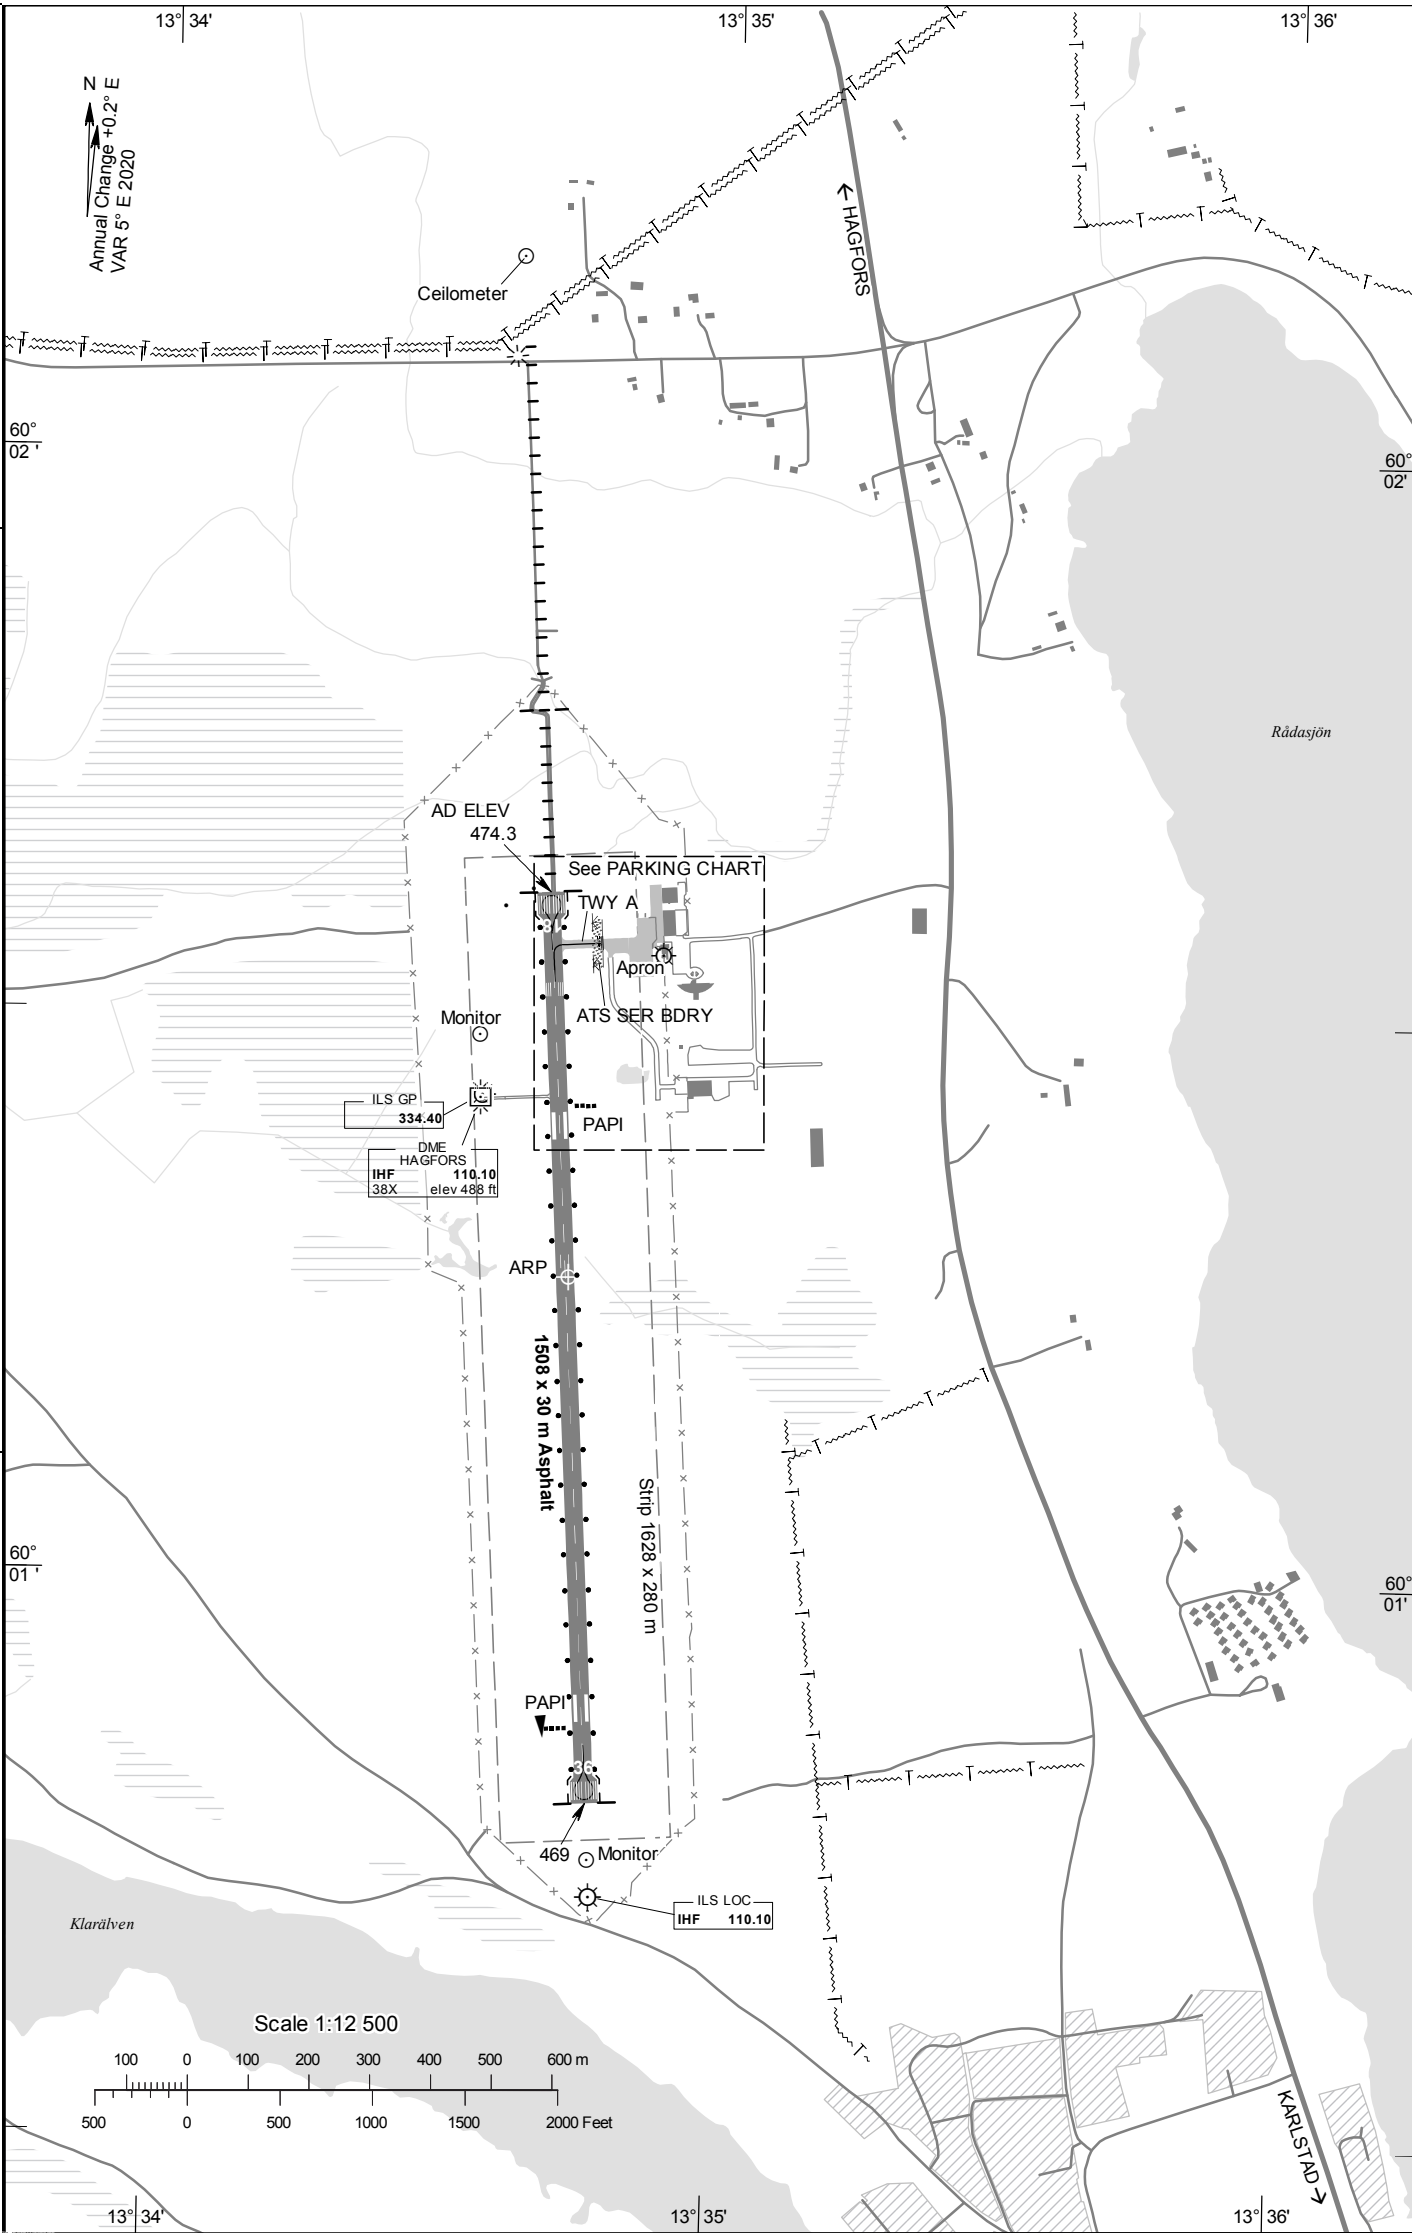

| RWY NR | TRUE & MAG BRG | THR PSN Geoid undulation | Bearing strength | THR ELEV and highest ELEV of TDZ of precision APCH RWY | Declared distances | | | | Approach and runway lighting | | | | |
|--------|-------------------------|--|------------------|---|--------------------|------|------|------|---|--------------------|---------------------------------|---|-----|
| | | | | | TORA | TODA | ASDA | LDA | APCH | THR TRID TDZ | VASIS (MEHT) | Edge | End |
| 18 | 176.69° GEO 172° MAG | 600136.57N 0133441.24E GUND 102.1 ft | PCN 25 F/B/X/T | THR 474.3 ft TDZ 474.3 ft | 1508 | 1508 | 1508 | 1508 | Barrette CL Cat I 900 m LIL/LIH | THR Green | PAPI Left/3.00° (50.0 ft) | 1508/60 m White Caution zone 600 m yellow LIL/LIH | Red |
| 36 | 356.69° GEO 352° MAG | 600047.91N 0133446.87E GUND 102 ft | PCN 25 F/B/X/T | THR 469 ft | 1508 | 1508 | 1508 | 1508 | | THR Green | PAPI Left/3.00° (21.5 ft) | 1508/60 M White Caution zone 600 m yellow LIL/LIH | Red |

