


STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

HALMSTAD TOWER	130.105
	135.055

RNAV (GNSS) STAR RWY 19

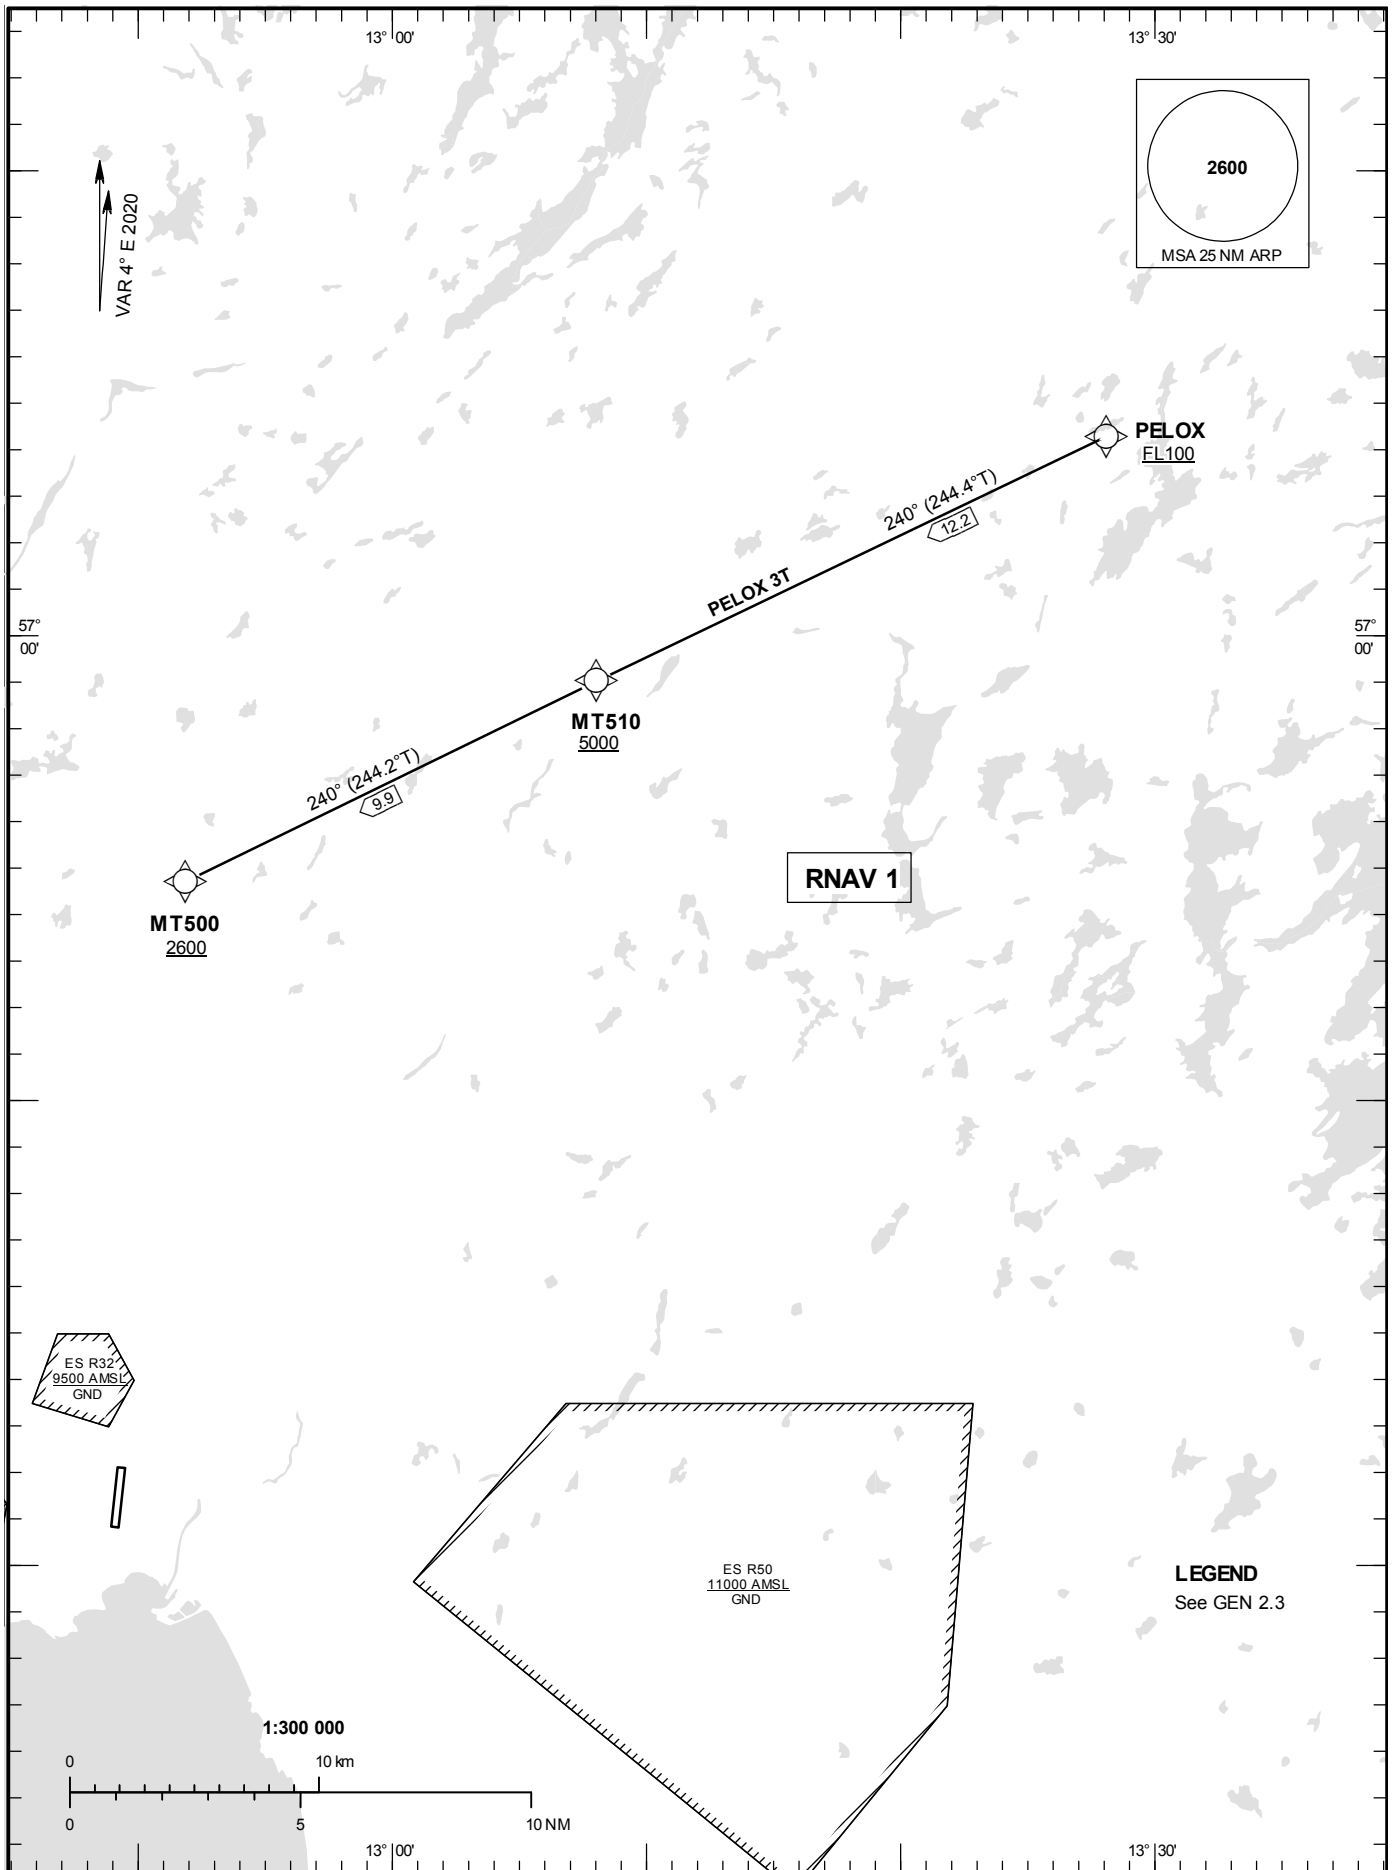

Prescribed Coding of RNAV STAR for RWY 19

PELOX 3T

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
IF	PELOX	-	-	-	-	+FL100	-	-	-	RNAV 1
TF	MT510	-	240°(244.4°)	12.2	-	+5000	-	-	-	RNAV 1
TF	MT500	-	240°(244.2°)	9.9	-	+2600	-	-	-	RNAV 1

STAR instruction: PELOX (FL 100 or above) – MT510 (5000 ft or above) – MT500 (2600 ft or above)