


**INSTRUMENT APPROACH CHART – ICAO**

**THR ELEV 478.3 ft, AD ELEV 507 ft**  
 OCH are related to THR.  
 Circling OCH are related to AD ELEV.  
 BRG are MAG  
 ALT, HGT and ELEV in ft.


LANDVETTER TOWER	118.605
LANDVETTER ATIS	118.380
GÖTEBORG APPROACH	124.680

**ILS or LOC RWY 03**

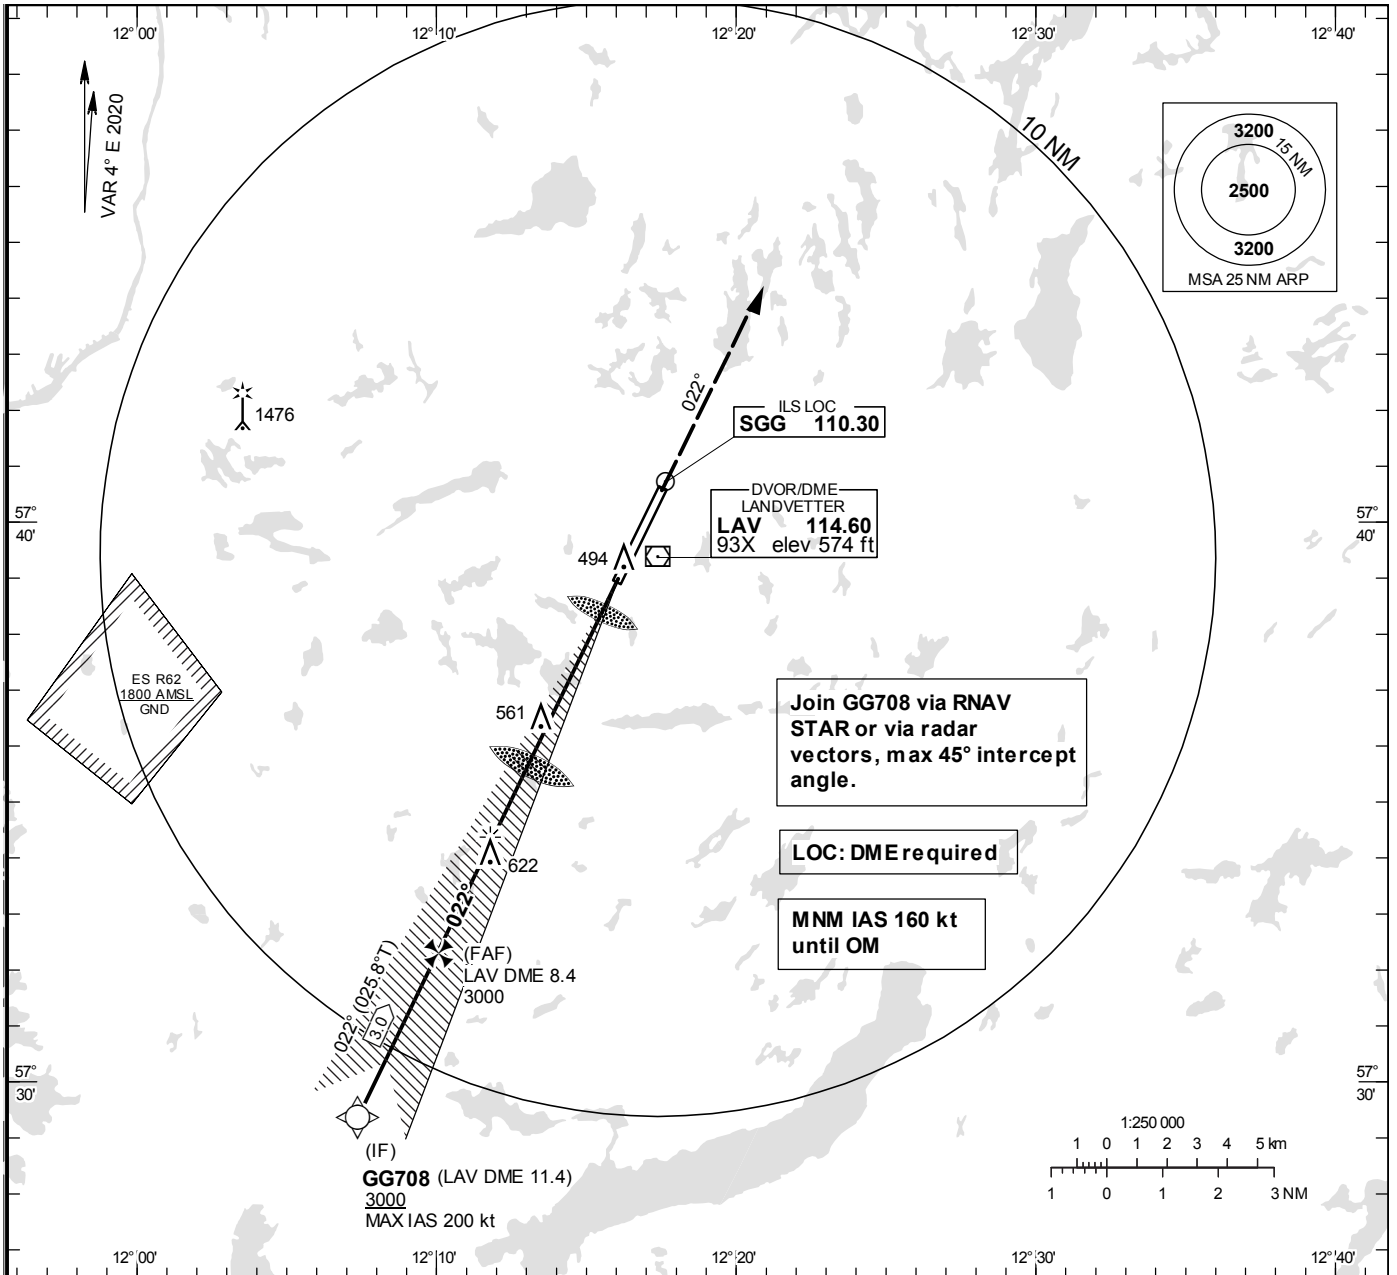

**TA 5000 ft AMSL**      **RDH 54.1 ft**      \*Timing not authorized for defining the MAPt

Special COM Failure procedures see ESGG AD 2.22

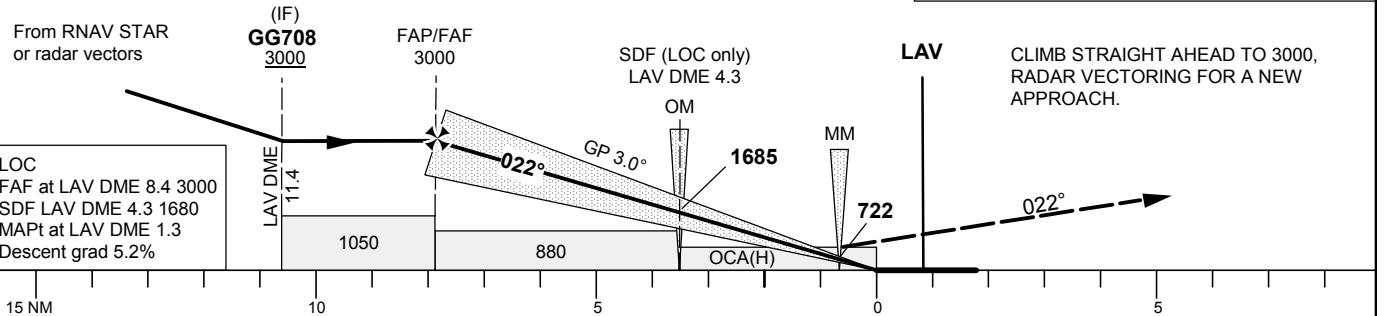

Cat of ACFT	OCA (H)					Final approach	LOC Distance FAF-MAPt 7.2 NM*								
	A	B	C	D	D <sub>L</sub>		DME LAV	NM	8	7	6	5	4	3	2
Straight-in Approach	CAT I	620(142)	629(151)	640(162)	650(172)	652(174)	ALT	ft	2862	2543	2224	1905	1584	1263	939
	CAT II	529(51)	540(62)	553(75)	565(87)	568(90)	GS	kt	80	100	120	140	160	180	
	LOC	820(350)					Time	min:s	5:24	4:19	3:36	3:05	2:42	2:24	
CAT III B Approved							Rate of descent	ft/min	425	530	635	745	850	955	