

ARP 582722N 0135822E

AD ELEV 324 FEET


LEGEND See GEN 2.3

Dimensions in m, ELEV in ft

| TWY NR | WIDTH | Surface Bearing strength | Day marking | | Taxiway lighting | |
|--------|-------|-----------------------------|-----------------------|--------------------|------------------|-----|
| | | | Centerline Holding | Edge Centerline | RGL Stopbar | RGL |
| A | 18 m | ASPH PCN 30 F/B/X/T | CL HLDG | EDGE | RGL | RGL |
| B | 10 m | ASPH PCN 9 F/B/X/U | CL HLDG | | | RGL |

REMARK: TWY B MAX wheel span 4.5 m

| INS Coordinates for Aircraft Stands | | | |
|--------------------------------------|----|-------|------|
| APRON Surface Bearing strength | NR | COORD | ELEV |
| CONC PCN 36 F/B/X/T | | | |

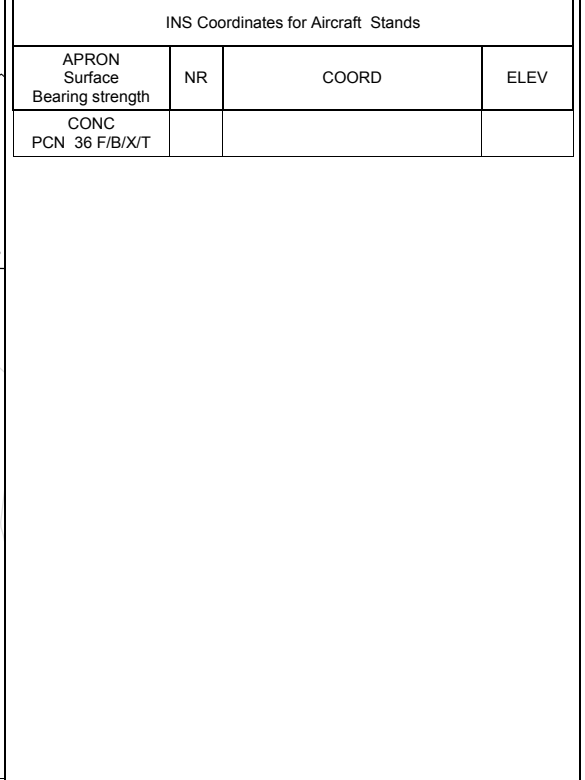

| RWY NR | TRUE & MAG BRG | THR PSN Geoid undulation | Bearing strength | THR ELEV and highest ELEV of TDZ of precision APCH RWY | Declared distances | | | | Approach and runway lighting | | | | |
|--------|-------------------------|--|------------------|---|--------------------|------|------|------|------------------------------|--------------------|---------------------------------|---|-----|
| | | | | | TORA | TODA | ASDA | LDA | APCH | THR TRID TDZ | VASIS (MEHT) | Edge | End |
| 01 | 015.71° GEO 011° MAG | 582655.96N 0135806.97E GUND 103 ft | PCN 30 F/B/X/T | THR 324 ft | 1736 | 1736 | 1736 | 1736 | SALS 420 m LIL/LIH | THR Green | PAPI Left/3.50° (45.3 ft) | 1736/40 m White Caution zone 600 m yellow LIL/LIH | Red |
| 19 | 195.72° GEO 191° MAG | 582749.97N 0135835.96E GUND 102.7 ft | PCN 30 F/B/X/T | THR 295.8 ft TDZ 306.9 ft | 1736 | 1736 | 1736 | 1736 | Cat I 900 m LIL/LIH | THR Green | PAPI Left/3.00° (49.9 ft) | 1736/40 m White Caution zone 600 m yellow LIL/LIH | Red |

