


STANDARD INSTRUMENT  
ARRIVAL CHART (STAR) -  
ICAO

HGT and ALT in ft  
BRG are MAG (True)  
TA 5000 ft AMSL

STURUP TOWER	118.805
SWEDEN CONTROL	134.980
STURUP ATIS	129.280

RNAV (GNSS) STAR RWY 17

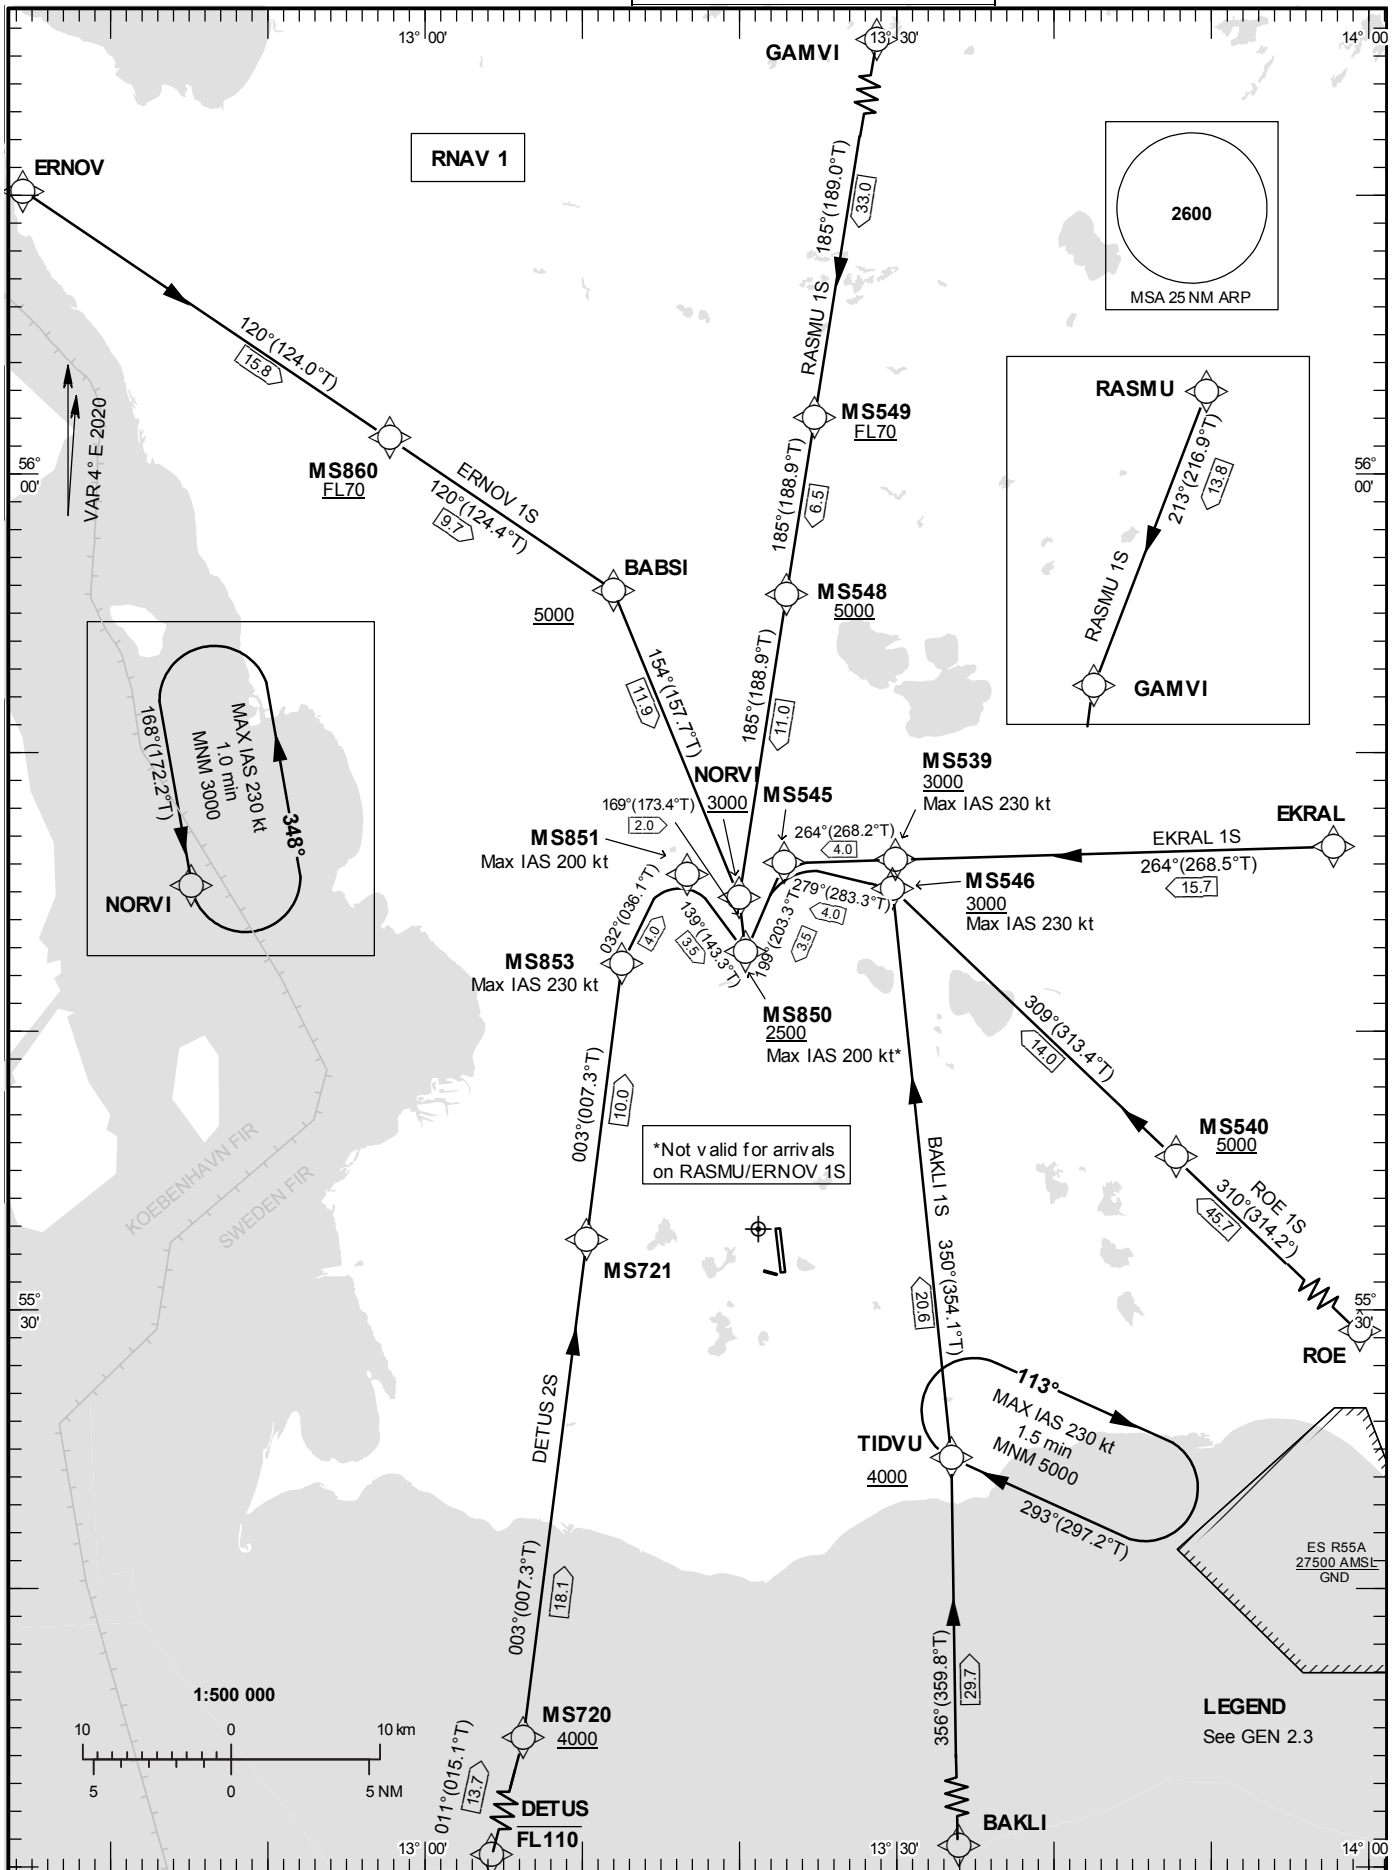

**Prescribed Coding of RNAV STAR for RWY 17**

RNAV 1 required, otherwise advise ATC.

RNAV STAR are based on GNSS only for position update.

At waypoints with a speed restriction only, an altitude has been added in the coding table in order to adapt to certain FMS equipments.

**BAKLI 1S**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	BAKLI	-	-	-	-	-	-	-	-	RNAV 1
TF	TIDVU	-	356°(359.8°)	29.7	-	+4000	-	-	-	RNAV 1
TF	MS546	-	350°(354.1°)	20.6	-	+3000	-230	-	-	RNAV 1
TF	MS545	-	279°(283.3°)	4.0	-	-	-	-	-	RNAV 1
TF	MS850	-	199°(203.3°)	3.5	-	+2500	-200	-	-	RNAV 1

STAR instruction: BAKLI – TIDVU (4000 ft or above) – MS546 (max IAS 230 kt, 3000 ft or above) – MS545 – MS850 (max IAS 200 kt, 2500 ft or above)

**DETUS 2S**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	DETUS	-	-	-	-	-FL110	-	-	-	RNAV 1
TF	MS720	-	011°(015.1°)	13.7	-	+4000	-	-	-	RNAV 1
TF	MS721	-	003°(007.3°)	18.1	-	-	-	-	-	RNAV 1
TF	MS853	-	003°(007.3°)	10.0	-	-	-230	-	-	RNAV 1
TF	MS851	-	032°(036.1°)	4.0	-	-	-200	-	-	RNAV 1
TF	MS850	-	139°(143.3°)	3.5	R	+2500	-200	-	-	RNAV 1

STAR instruction: DETUS (FL110 or below) – MS720 (4000 ft or above) – MS721 – MS853 (max IAS 230 kt) – MS851 (max IAS 200 kt) – MS850 (max IAS 200kt, 2500 ft or above)

**EKRAL 1S**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	EKRAL	-	-	-	-	-	-	-	-	RNAV 1
TF	MS539	-	264°(268.5°)	15.7	-	+3000	-230	-	-	RNAV 1
TF	MS545	-	264°(268.2°)	4.0	-	-	-	-	-	RNAV 1
TF	MS850	-	199°(203.3°)	3.5	-	+2500	-200	-	-	RNAV 1

STAR instruction: EKRAL – MS539 (max IAS 230 kt, 3000 ft or above) – MS545 - MS850 (max IAS 200 kt, 2500 ft or above)

## ERNOV 1S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	ERNOV	-	-	-	-	-	-	-	-	RNAV 1
TF	MS860	-	120°(124.0°)	15.8	-	+FL70	-	-	-	RNAV 1
TF	BABSI	-	120°(124.4°)	9.7	-	+5000	-	-	-	RNAV 1
TF	NORVI	-	154°(157.7°)	11.9	-	+3000	-	-	-	RNAV 1
TF	MS850	-	169°(173.4°)	2.0	-	+2500	-	-	-	RNAV 1

STAR instruction: ERNOV – MS860 (FL70 or above) – BABSI (5000 ft or above) – NORVI (3000 ft or above) – MS850 (2500 ft or above)

## RASMU 1S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	RASMU	-	-	-	-	-	-	-	-	RNAV 1
TF	GAMVI	-	213°(216.9°)	13.8	-	-	-	-	-	RNAV 1
TF	MS549	-	185°(189.0°)	33.0	-	+FL70	-	-	-	RNAV 1
TF	MS548	-	185°(188.9°)	6.5	-	+5000	-	-	-	RNAV 1
TF	NORVI	-	185°(188.9°)	11.0	-	+3000	-	-	-	RNAV 1
TF	MS850	-	169°(173.4°)	2.0	-	+2500	-	-	-	RNAV 1

STAR instruction: RASMU – GAMVI – MS549 (FL70 or above) – MS548 (5000 ft or above) – NORVI (3000 ft or above) – MS850 (2500 ft or above)

## ROE 1S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	ROE	-	-	-	-	-	-	-	-	RNAV 1
TF	MS540	-	310°(314.2°)	45.7	-	+5000	-	-	-	RNAV 1
TF	MS546	-	309°(313.4°)	14.0	-	+3000	-230	-	-	RNAV 1
TF	MS545	-	279°(283.3°)	4.0	-	-	-	-	-	RNAV 1
TF	MS850	-	199°(203.3°)	3.5	-	+2500	-200	-	-	RNAV 1

STAR instruction: ROE – MS540 (5000 ft or above) – MS546 (max IAS 230 kt, 3000 ft or above) – MS545 – MS850 (max IAS 200 kt, 2500 ft or above)